




# CER TRIAX F CON

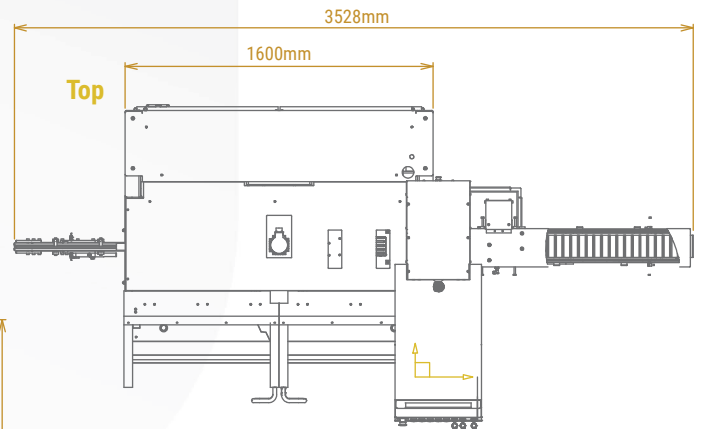


Side

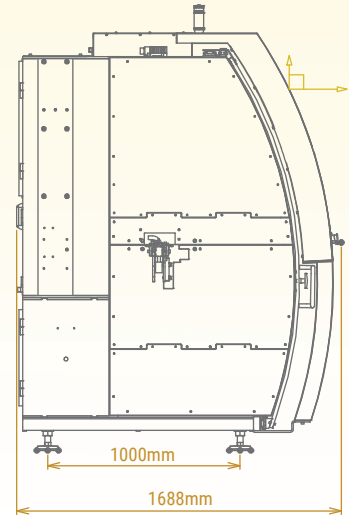

Open Doors

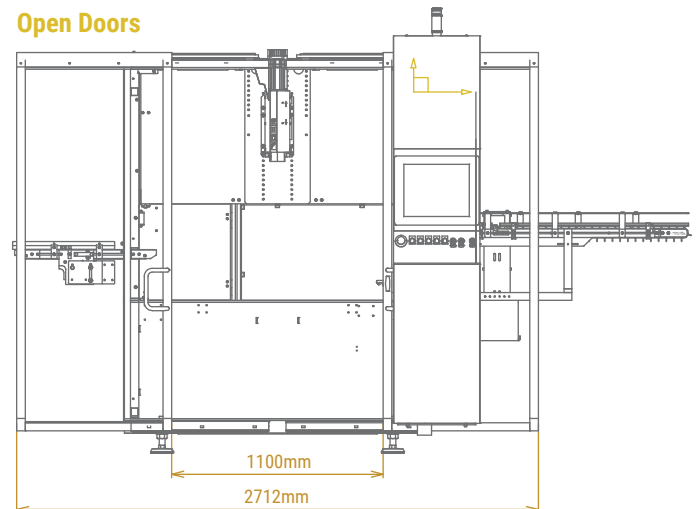

Front

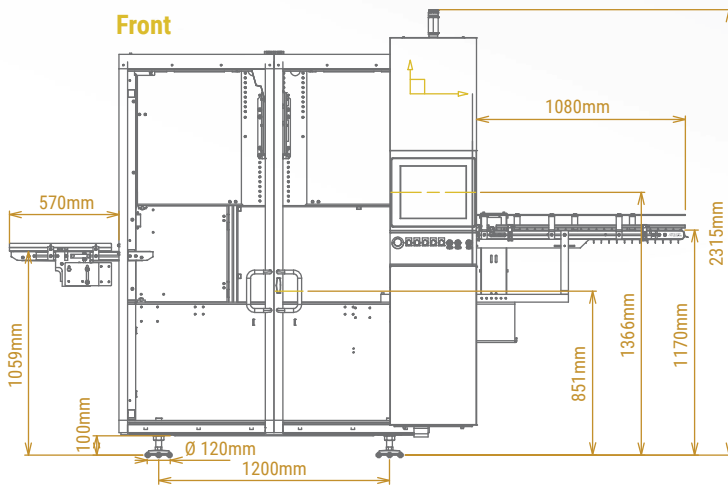

## Machine Characteristics & Dimensions

Weight 2000 kg      Power Consumption 7 kW MAXI  
 Air Consumption ~800 l/min      Power 400 V TRI+N

## MACHINE SPECIFICATIONS

<b>Power</b>	400V (three phase + neutral)	TT or TN Network (if not, a transformer is required)	Air Pressure (between 5 & 7 bars)
<b>Parts</b>	<b>Conical (Plastic)</b>		
	Minimum Length (40mm)	Maximum Length (110mm)	
	Ø Minimum (7mm, with flat die)	Ø Maximum (25mm, with flat die)	
	Minimum Conical Radius (75mm)	Half-angle on Cone (10°)	
<b>General</b>	Minimum Distance Between Decoration and Base of Part (8mm, if adapted registration dot 0mm)	Maximum Distance From Top of Decoration to Base of Part (110mm, if part holder can be inscribed in smallest diameter of decoration area)	
	Maximum Height of Decoration (100mm)	Vertical Travel (110mm)	
	Machine Angle Max (+/-28°)		
<b>Configuration</b>	Conveyor Width (45mm - see layout)	Foil Reels Maximum Diameter (Ø180mm) (1500m, with S5400)	
	Maximum Foil Width (120mm)	Ripped Foil Sensor	
	End of Foil Reel Sensor	Pneumatic Reel Tensioner	
Electrical/Mechanical Part Registration			
<b>Printing Modes</b>	Conical Rolling Print (with flat die, 145mm printing length with a single rotation or double rotation with die reset between print cycles) (conical - cylindrical rolling possible)	Cylindrical Rolling Print (with flat die, 145mm printing length with a single rotation or double rotation with die reset between print cycles) (cylindrical - conical rolling possible)	
	Minimum Printing Speed (2m/minute)	Maximum Printing Speed (30m/minute)	
	Up to 7 Individual Vertical Stamping Prints (if the conical system is installed, only one vertical stamping print is possible)		
<b>Camera</b>	Black & White	CVI-L (110mm wide inspection zone)	

## TRIAX F CON



A Member of the Industrial Decorating Solutions (IDS) Group

### CONTACT

E-mail [info-cer@itwids.com](mailto:info-cer@itwids.com)

Tel +33 (0)4 74 73 26 00

[www.itwcer.com](http://www.itwcer.com)